

marantz®



SR6012

9.2 CHANNEL FULL 4K NETWORK AV RECEIVER WITH HEOS MUSIC STREAMING

The SR6012 offers nine channels of powerful amplification, 11.2-channel processing and preouts, and extended custom installation features including Crestron Connected compatibility. Selected discrete components including Marantz HDAMs ensure superb sonic performance with both music and movies. The SR6012 can drive 5.1.4 or 7.1.2 speaker configurations, delivering all the immersive 3D sound of Dolby Atmos and DTS:X, and its 11.2-channel processing allows 7.1.4-channel working with the addition of an extra two-channel amplifier. An additional HDMI output allows audio and video to be sent to a second zone, as well as two displays – such as a TV and projector – in the main room.

Highlights

Your Benefits

9.2 channel AV Receiver with 110 W per channel (8 ohm, 20 Hz - 20 kHz, 0.08% 2ch Drive)

Enough power to fill bigger rooms with renowned Marantz sound

Built-in Wi-Fi with 2.4GHz/5GHz dual band support; built-in Bluetooth®

Improved network stability especially in Wi-Fi-crowded homes

4K/60 Hz full-rate pass-through, 4:4:4 color resolution, HDR and BT.2020, plus Dolby Vision compatibility and Hybrid Log Gamma (HLG)

Latest HDMI standard for future-proof compatibility

8 HDMI inputs (incl. 1 front) with full HDCP 2.2 support; 3 HDMI outputs

Extended connectivity; 2 main zone HDMI outputs + 1 zone output

Analog to HDMI conversion and full rate 4K Upscaling

Full HD and even Ultra HD video quality from existing video sources

eARC (Enhanced Audio Return channel; via future firmware update)

Dolby Atmos/DTS:X from TV apps over HDMI connection

Dolby Atmos (up to 7.1.4 with add. 2ch amplifier) and DTS:X

Immersive 3D sound with effects from overhead

AKM AK4458 32-bit D/A converters; HDAM; Current Feedback circuitry; Hybrid PLL Clock Jitter Reducer

For the most accurate and detailed audio reproduction

AirPlay, Bluetooth, Internet Radio, Spotify Connect, Network Audio Streaming

Access to almost unlimited online music sources

DSD (2.8/5.6MHz), FLAC, ALAC and WAV support

High Resolution audio streaming, even gapless

Audyssey MultEQ XT32, Dynamic Volume and Dynamic EQ, LFC, Sub EQ HT

Delivering the most advanced equalization for your individual room

Color-coded speaker terminals, Setup Assistant, Marantz AVR Remote App

Hassle-free installation, setup and operation

Intelligent ECO mode with off/on/auto setting


Energy-conscious without compromising on performance



because music matters

SR6012

9.2 CHANNEL FULL 4K NETWORK AV RECEIVER WITH HEOS MUSIC STREAMING

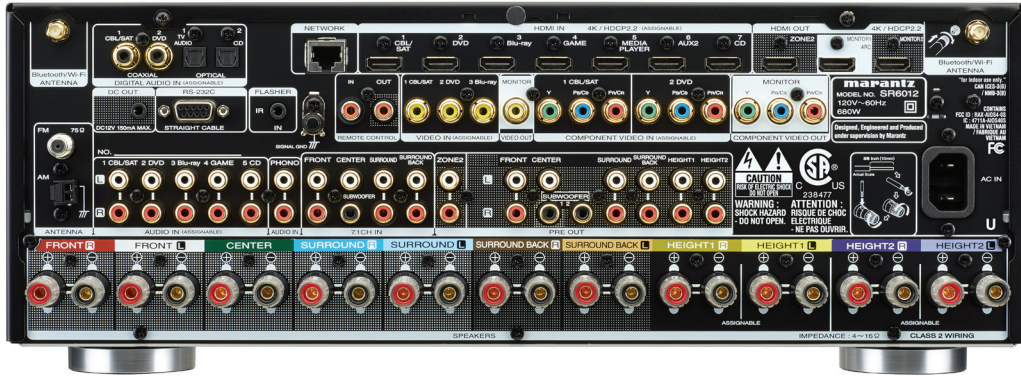

FEATURES	SR6012
MULTICHANNEL SURROUND	
DTS HD Master / DTS:X / DTS Neural:X	• / • / •
Dolby TrueHD / Dolby Atmos / Dolby Surround	• / • / •
Multichannel Stereo	•
Compressed audio Enhancer: MDAX2	•
Audyssey	MultEQ XT32 with LFC/Sub EQ HT
Audyssey Dynamic EQ / Dynamic Volume	• / •
Audyssey MultEQ Editor App support	•
NETWORK / SOURCES	
Network Audio Streaming	•
HEOS Multiroom integrated	•
Lossy formats MP3 / WMA / AAC	• / • / •
Lossless formats FLAC / ALAC / WAV	• / • / •
DSD Streaming	• (2.8 MHz / 5.6 MHz)
FLAC HD 192/24 / WAV 192/24 / ALAC 192/24	• / • / •
Gapless playback	• (FLAC, WAV, ALAC, DSD)
AirPlay audio streaming	•
Internet Radio (TuneIn)	•
Spotify Connect, Deezer, TIDAL, Napster, Soundcloud *	• / • / • / • / •
Compatible with Remote APP for Smart Phones	Android/iOS
Ethernet / Wi-Fi	• / • (dual antenna / dual band)
Network: (IP-control / update)	• / •
Front Inputs: HDMI / USB	• / •
USB Audio	•
FM / AM Tuner	• / •
Bluetooth	•
HDMI	
4K 60Hz 4:4:4 resolution / HDCP 2.2	• / •
eARC (Enhanced Audio Return Channel)	• (via Firmware Update)
Dolby Vision compatible / Hybrid Log Gamma (HLG)	• / •
HDMI pass through on stand-by	•
3D video pass through	•
Video conversion	CVBS / HDMI; Comp / HDMI
Videoprocessing and -scaling	1080p, 4K 60/50Hz

* This feature is not available in all countries.

INPUTS/OUTPUTS	
VIDEO	
Composite In / Out	3+1 / 1
Component In / Out	2 / 1
HDMI In / Out	7+1 / 2 main + 1 zone out
AUDIO	
Analog In / Out	6+1 / 0 (incl. Phono)
Digital Optical In	2
Digital Coaxial In	2
Multichannel Pre Out	• (11.2 with 11.2 processing)
Zone audio preout	•
Subwoofer Out	2
7.1 Multichannel input	•
SPECIFICATIONS	
Number of poweramps	9
Power Output per channel	
6 ohm, 1 kHz, 10%, 1ch Drive	220 W
6 ohm, 1 kHz, 0.7%, 2ch Drive	150 W
8 ohm, 20 Hz - 20 kHz, 0.08%, 2ch Drive	110 W
Audio Signal to Noise Ratio	102 dB
GENERAL	
Available color: Black	•
System Remote Control	RC035SR
Power Consumption in W	680
Power Consumption No-Sound (ECO ...on/off) in W	60 / 100
Standby Consumption in W	0.2 (with CEC 0.5)
Maximum Dimensions (W x D x H) in inches	17.3 x 15.7 x 6.3
Weight in lbs	28.2
UPC	
NA SR6012	699927151058 Black

Design and specifications are subject to change by Marantz without notice.

Sound United LLC
North America Regional Headquarters
1 Viper Way
Vista, CA 92081

TOPAV
www.topav.com.vn

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by D&M Holdings Inc. is under license. Dolby, Dolby Atmos, and the double-D symbol are trademarks of Dolby Laboratories. DTS, the Symbol, DTS in combination with the Symbol, DTS:X, and the DTS:X logo are registered trademarks or trademarks of DTS, Inc. in the United States and/or other countries. The Spotify software is subject to third party licenses found here: www.spotify.com/connect/third-party-licenses. Other trademarks and trade names are those of their respective owners. Marantz is a trademark or registered trademark of D&M Holdings, Inc.

* All specs can be subject to change.